




MODEL H5377 3/4 HP ELECTRIC MOTOR INSTRUCTIONS


For questions or help with this product contact Tech Support at (570) 546-9663 or techsupport@grizzly.com

Model H5377 Specifications


Power 3/4 HP
 Cycle.....60 Hz
 Voltage..... 110/220V
 Prewired Voltage 110V
 Amps9/4.5A
 Speed 1725 RPM
 PhaseSingle-Phase
 Class..... B

Replaceable Parts

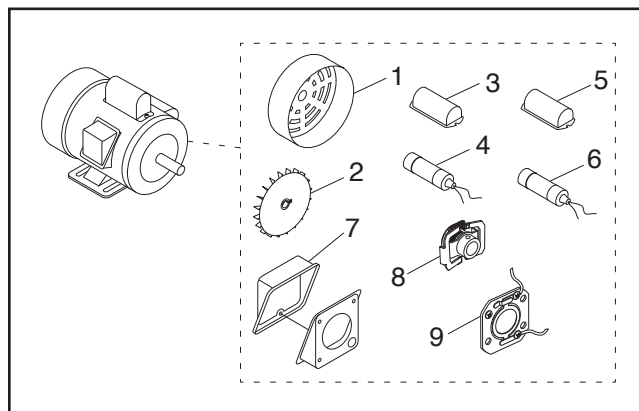



! WARNING
 Electrocutation or fire could result if this motor is not grounded correctly or if your wire connections do not comply with local and state codes. Ensure compliance by checking with a qualified electrician!



! WARNING
 Disconnect power when replacing motor. Failure to do this may result in serious personal injury.

REF	PART #	DESCRIPTION
1	PH5377001	MOTOR FAN COVER
2	PH5377002	MOTOR FAN
3	PH5377003	S CAPACITOR COVER
4	PH5377004	S CAPACITOR 200M 125V 1-1/2 X 2-3/8
5	PH5377005	R CAPACITOR COVER
6	PH5377006	R CAPACITOR 30M 250V 1-1/2 X 2-3/8
7	PH5377007	JUNCTION BOX
8	PH5377008	CENTRIFUGAL SWITCH
9	PH5377009	CONTACT PLATE

Making Wire Connections


If you are unsure how to attach wires to terminals, DO NOT continue. Contact an electrician for assistance. Connecting wires improperly may cause them to come loose or contact other wires, which can cause electrocution, fire, or a short.

COPYRIGHT © DECEMBER, 2007 BY GRIZZLY INDUSTRIAL, INC., REVISED NOVEMBER, 2024 (LW)
 NO PORTION OF THIS INSTRUCTION SHEET MAY BE REPRODUCED IN ANY SHAPE
 OR FORM WITHOUT THE WRITTEN APPROVAL OF GRIZZLY INDUSTRIAL, INC.
 (FOR MODELS MFD. SINCE 08/24) #JB10223 PRINTED IN TAIWAN

V2.11.24

Keep for Future Reference

H5377 Wiring Diagram

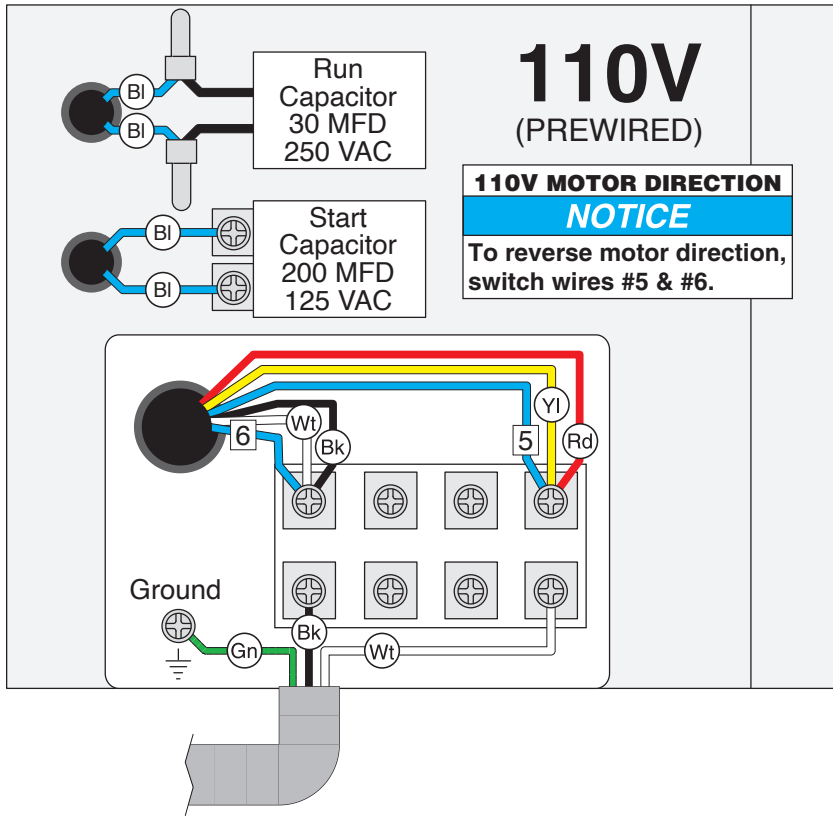

110V MOTOR DIRECTION
NOTICE
 To reverse motor direction, switch wires #5 & #6.

COLOR KEY

BLACK		Bk
WHITE		Wt
GREEN		Gn
RED		Rd
YELLOW		Yl
BLUE		Bl

NOTICE

The motor wiring shown here is current at the time of printing, but it may not match your motor. Always use the wiring diagram inside the motor junction box.

WARNING!

SHOCK HAZARD!
 Disconnect power before working on wiring.

